

## Design

The Hallite 11 is a vee pack rod seal for medium duty applications offering excellent performance and long life even under difficult operating conditions such as pressure surges, vibration and some misalignment. The seal consists of a male and female adaptor and 5 vee rings.

The male adaptor is usually manufactured from polyacetal but some of the larger sizes use rubberised fabric. It has grooves across one face to ensure equal pressure to the sealing edges of the vee ring.


All sizes have three vee rings manufactured from rubberised fabric because this has strength and durability and permits an oil film to lubricate the other parts of the seal. Two rubber vee rings are supplied between the rubberised fabric vee rings (up to and including 140mm diameter) to aid low pressure sealing.

The female adaptor uses a hard rubberised fabric to support the vee rings and protect them from extrusion damage. At high pressure the lips of the adaptor acts as a secondary seal.

The proportions of the range have been determined to give a satisfactory performance when used with the recommended operating conditions.

### Features

- Precision moulded vee rings
- Pressure distribution adaptors
- Reliable sealing

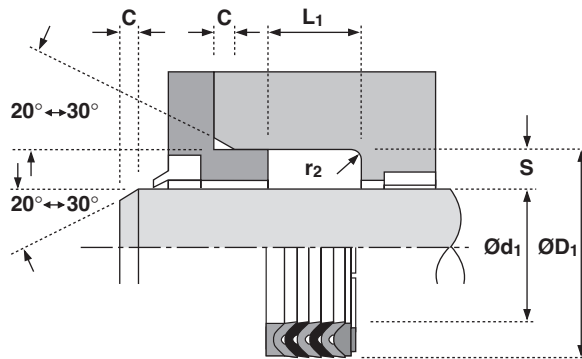

### Technical details

#### Operating conditions

Maximum Speed	0.5 m/sec
Temperature Range	-30°C +100°C
Maximum Pressure	400 bar

#### Inch

1.5 ft/sec
-22°F +212°F
6,000 p.s.i.

#### Maximum extrusion gap

Pressure bar	100	160	250	400
Maximum Gap mm	0.45	0.4	0.3	0.2
Pressure p.s.i.	1500	2400	3750	6000

Figures show the maximum permissible gap all on one side using minimum rod  $\varnothing$  and maximum clearance  $\varnothing$ . Refer to Housing Design section.

#### Surface roughness

	$\mu\text{mRa}$	$\mu\text{mRt}$	$\mu\text{inCLA}$	$\mu\text{inRMS}$
Dynamic Sealing Face $\varnothing d_1$	0.1 < > 0.4	4 max	4 < > 16	5 < > 18
Static Sealing Face $\varnothing D_1$	1.6 max	10 max	63 max	70 max
Static Housing Faces $L_1$	3.2 max	16 max	125 max	140 max


#### Chamfers & Radii

Groove Section $\leq S$ mm	7.5	10.0	12.5	15.0
Min Chamfer C mm	4.0	5.0	6.5	7.5
Max Fillet Rad $r_1$ mm	0.4	1.2	1.6	1.6

#### Tolerances

$\varnothing d_1$	$\varnothing D_1$	$L_1$ mm
f9	H11	+0.2 -0



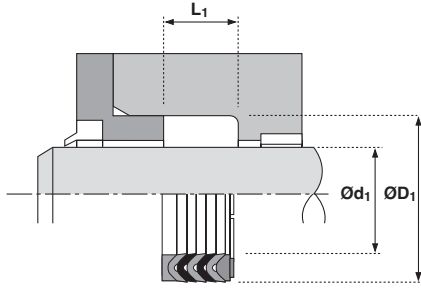

Ød <sub>1</sub>	TOL f <sub>9</sub>	ØD <sub>1</sub>	TOL H11	L <sub>1</sub> +0.2-0	PART No.
20	-0.020 -0.072	30	+0.13 +0.00	18.50	4201750
25	-0.020 -0.072	37	+0.16 +0.00	22.50	4198950
28	-0.020 -0.072	40	+0.16 +0.00	22.50	4202050
30	-0.020 -0.072	42	+0.16 +0.00	22.50	4202150
32	-0.025 -0.087	44	+0.16 +0.00	22.50	4202250
35	-0.025 -0.087	47	+0.16 +0.00	22.50	4202350
36	-0.025 -0.087	48	+0.16 +0.00	22.50	4202450
40	-0.025 -0.087	52	+0.19 +0.00	22.50	4202550
42	-0.025 -0.087	54	+0.19 +0.00	22.50	4202650
45	-0.025 -0.087	60	+0.19 +0.00	22.50	4202750
50	-0.025 -0.087	65	+0.19 +0.00	22.50	4199050
55	-0.030 -0.104	70	+0.19 +0.00	22.50	4202950
56	-0.030 -0.104	71	+0.19 +0.00	22.50	4203050
60	-0.030 -0.104	75	+0.19 +0.00	22.50	4203150
63	-0.030 -0.104	78	+0.19 +0.00	22.50	4203250

Ød <sub>1</sub>	TOL f <sub>9</sub>	ØD <sub>1</sub>	TOL H11	L <sub>1</sub> +0.2-0	PART No.
65	-0.030 -0.104	80	+0.19 +0.00	22.50	4203350
70	-0.030 -0.104	85	+0.22 +0.00	22.50	4203450
75	-0.030 -0.104	90	+0.22 +0.00	22.50	4203550
80	-0.030 -0.104	95	+0.22 +0.00	22.50	4203650
85	-0.036 -0.123	100	+0.22 +0.00	22.50	4203750
90	-0.036 -0.123	105	+0.22 +0.00	22.50	4203850
100	-0.036 -0.123	115	+0.22 +0.00	30.00	4203950
110	-0.036 -0.123	125	+0.25 +0.00	30.00	4204050
125	-0.043 -0.143	140	+0.25 +0.00	34.00	4204250
140	-0.043 -0.143	155	+0.25 +0.00	34.00	4199250
150	-0.043 -0.143	170	+0.25 +0.00	40.00	2196650
160	-0.043 -0.143	180	+0.25 +0.00	40.00	2196750
180	-0.043 -0.143	200	+0.29 +0.00	40.00	2196850
200	-0.050 -0.165	220	+0.29 +0.00	40.00	2196950

vee pack sets - metric

**Seal & Design  
Able Division**

5533 Steeles Avenue West Unit 11  
Toronto, Ontario M9L 1S7  
Ph: (416) 741-0750  
Gasket@AbleSealAndDesign.com

**Seal & Design  
Corporate Headquarters**

4015 Casilio Parkway  
Clarence, NY 14031  
Ph: (716) 759-2222  
Info@SealAndDesign.com  
www.SealAndDesign.com

**Seal & Design  
Higbee Division**

6741 Thompson Rd N  
Syracuse, NY 13221  
Ph: (315) 432-8021  
Sales@Higbee-Inc.com