




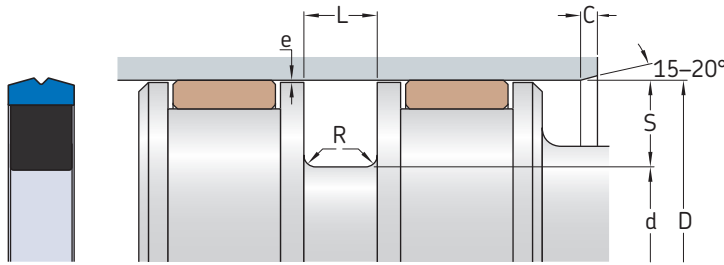
## MPV profile data



<b>Material codes</b>	Slide ring: X-ECOPUR PS Energizer: N80/198
<b>Pressure</b>	Up to 400 bar (5 800 psi)
<b>Speed</b>	Up to 1 m/s (3.2 ft/s)
<b>Temperature range</b>	 <p><b>Extreme low temperature range:</b> may be intermittently exposed (e.g. cold start-up) without seal damage, but seal performance may be compromised while in this range</p> <p>Temperatures below the recommended operating range: seal performance depends on system design (precision guiding arrangement recommended)</p> <p><b>Recommended operating temperature range for this profile and material</b></p> <p>Temperatures above the recommended operating range: acceptable only with reduced pressure, speed, and/or e-gap</p> <p><b>Extreme high temperature range:</b> only occasional short-term exposure (e.g. cylinder in curing oven of a powder coating process)</p>
<b>Dimension standards</b>	Some sizes fit seal housings in accordance with ISO 7425-1.

Maximum values of application parameters (e.g. pressure, speed, temperature, e-gap) should not be applied continuously nor simultaneously.

D 50 – 200 mm



Maximum extrusion gap e

Radial depth S	e <sub>max</sub> at 80 °C (175 °F) for pressures		
	160 bar	250 bar	400 bar

mm	mm		
3,75	0,4	0,4	–
5,5	0,5	0,4	0,3
7,75	0,6	0,45	0,3
10,5	0,7	0,55	0,4

Dimensions

D	d	L	S	R	C	Designation
H9	h9	+0,2		max.	min.	

mm

50	34,5	6,3	7,75	1,3	5	• MPV-50x34.5x6.3
55	39,5	6,3	7,75	1,3	5	MPV-55x39.5x6.3
60	44,5	6,3	7,75	1,3	5	MPV-60x44.5x6.3
63	47,5	6,3	7,75	1,3	5	• MPV-63x47.5x6.3
65	49,5	6,3	7,75	1,3	5	MPV-65x49.5x6.3
70	54,5	6,3	7,75	1,3	5	MPV-70x54.5x6.3
	59	4,2	5,5	1,3	5	MPV-70x59x4.2
75	59,5	6,3	7,75	1,3	5	MPV-75x59.5x6.3
80	59	8,1	10,5	1,8	6	MPV-80x59x8.1
	64,5	6,3	7,75	1,8	6	• MPV-80x64.5x6.3
85	64	8,1	10,5	1,8	6	MPV-85x64x8.1
90	69	8,1	10,5	1,8	6	MPV-90x69x8.1
100	79	8,1	10,5	1,8	6	MPV-100x79x8.1
110	89	8,1	10,5	1,8	6	MPV-110x89x8.1
120	99	8,1	10,5	1,8	6	MPV-120x99x8.1
125	104	8,1	10,5	1,8	6	MPV-125x104x8.1
130	109	8,1	10,5	1,8	6	MPV-130x109x8.1
150	129	8,1	10,5	1,8	6	MPV-150x129x8.1
160	139	8,1	10,5	1,8	6	• MPV-160x139x8.1
180	159	8,1	10,5	1,8	6	MPV-180x159x8.1
200	179	8,1	10,5	1,8	6	• MPV-200x179x8.1

Other sizes are available on request

• Seal housing dimensions in accordance with ISO 7425-1

**Seal & Design  
Able Division**

5533 Steeles Avenue West Unit 11  
Toronto, Ontario M9L 1S7  
Ph: (416) 741-0750  
Gasket@AbleSealAndDesign.com

**Seal & Design  
Corporate Headquarters**

4015 Casilio Parkway  
Clarence, NY 14031  
Ph: (716) 759-2222  
Info@SealAndDesign.com  
www.SealAndDesign.com

**Seal & Design  
Higbee Division**

6741 Thompson Rd N  
Syracuse, NY 13221  
Ph: (315) 432-8021  
Sales@Higbee-Inc.com