



# 3M™ Thermally Conductive Silicone Interface Pad 5514

## Product Description

3M™ Thermally Conductive Silicone Interface Pad 5514 is a silicone elastomer sheet, designed to provide heat transfer path between heat generating components and heat sinks, heat spreaders and other cooling devices.

## Features and Benefits


- Good thermal conductivity (1.6 W/m-K)
- Hardness: Shore 00 = 58
- Good dielectric properties
- UL 94 V-1
- High temperature resistance
- Good conforming for complicated shape
- Good flexibility with over bending
- Thin thickness, 0.20 mm and 0.25 mm
- Roll is available

## Product Uses

This product can be used for heat management of electronic devices and joining/stacking parts in electronic components.

## Product Construction

3M™ Thermally Conductive Silicone Interface Pad 5514

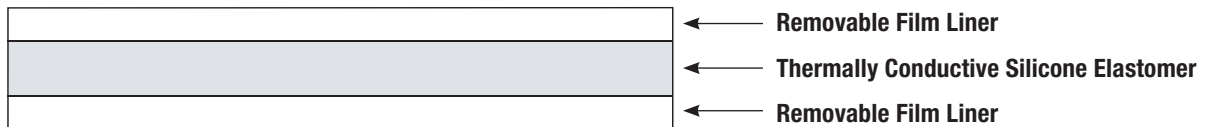

Standard thickness (excluding liner): 0.25 mm

## Application Ideas

- IC Packaging Heat Conduction
- Printed Circuit Board
- Spacer for Battery Module/Pack
- Heat Sink by Aluminum, other metal and ceramic
- COF Chip Heat Conduction
- LED Board TIM
- HD TV Address IC Chip and Scan Module
- Thin Gap Filling between board, module and chassis

Mechanical fastening such as clamp, bracket, screw and additional tapes and adhesives bonding can be used in parallel with this pad.



## Typical Physical Properties and Performance Characteristics

**Note:** The following technical information and data should be considered representative or typical only and should not be used for specification purposes.

3M™ Thermally Conductive Silicone Interface Pad 5514-20 and 5514-25				
Property	Value			Method
Thickness (mm)	0.20 / 0.25 (±0.025mm)			–
Thermal Conductivity (W/mK)*	1.06			QTM-500
Flammability	UL 94 V-1			UL 94
Density (g/cm <sup>3</sup> , @ 25°C)*	2.4 (±0.25)			TS-TM-441
Hardness (Shore 00)*	55 (±10)			ASTM D2240
Volume Resistivity (Ω-cm)*	8.6 x 10 <sup>13</sup>			ASTM D257
Dielectric Strength (kV/mm)*	14.15			ASTM D149
Dielectric Constant*	100 Hz	1 Khz	1 Mhz	ASTM D150
	15.7	15.7	15.6	

\*3M™ Thermally Conductive Interface Silicone Pad 5514-25 tested.

### Heat resistance of 3M™ Thermally Conductive Silicone Interface Pad 5514-25

Duration	Initial	100	500	1000
Thermal Conductivity (W/mK)	1.6	1.6	1.6	1.6
Hardness (Shore 00)	56	56	56	56
Appearance	–	No effect	No effect	No effect

Aged at 130°C in high temperature chamber.

## Application Techniques

- Positioning is dependent upon the total amount of surface contact developed. Firm application pressure helps develop better contact.
- To obtain optimum thermal conductivity, the wetting surfaces must be maximized. For better contact, clean, dry and well unified surface condition is recommended. Typical surface cleaning solvents are isopropyl alcohol and water (rubbing alcohol) or heptane. **Note:** Be sure to follow manufacturer’s safety precautions and directions for use when using solvents.
- Ideal application temperature range is from 0°C to 40°C. Initial application to surfaces at temperatures below 0°C is not recommended because the pad becomes too firm to be wetted readily. However, once properly applied, low temperature holding is generally satisfactory.

## Storage and Shelf Life

The shelf life of 3M™ Thermally Conductive Silicone Interface Pad 5514 is 12 months from the manufacture date when stored in original packaging at 21°C (70°F) and 50% relative humidity.

## Regulatory

For regulatory information about this product, contact your 3M representative.

## Technical Information

The technical information, recommendations and other statements contained in this document are based upon tests or experience that 3M believes are reliable, but the accuracy or completeness of such information is not guaranteed.

## Product Use

Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. Given the variety of factors that can affect the use and performance of a 3M product, user is solely responsible for evaluating the 3M product and determining whether it is fit for a particular purpose and suitable for user's method of application.

## Warranty, Limited Remedy, and Disclaimer

Unless an additional warranty is specifically stated on the applicable 3M product packaging or product literature, 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. If the 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

## Limitation of Liability

Except where prohibited by law, 3M will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.



**Seal & Design  
Able Division**  
5533 Steeles Avenue West Unit 11  
Toronto, Ontario M9L 1S7  
Ph: (416) 741-0750  
Gasket@AbleSealAndDesign.com



**Seal & Design  
Corporate Headquarters**  
4015 Casilio Parkway  
Clarence, NY 14031  
Ph: (716) 759-2222  
Info@SealAndDesign.com  
[www.SealAndDesign.com](http://www.SealAndDesign.com)



**Seal & Design  
Higbee Division**  
6741 Thompson Rd N  
Syracuse, NY 13221  
Ph: (315) 432-8021  
Sales@Higbee-Inc.com