

## Flexible Graphite HL

- Standard Industrial Grade Graphite
- Superior Chemical Resistance
- Highly Compressible & Compactible
- Low Gas Permeability
- Low Electrical Resistance
- Unlimited Shelf Life


Typical values refer to 1/16" material unless otherwise specified.

See graphs for temperature & pressure limits



<b>Creep Relaxation</b> ASTM F38B (1/32")	10%
<b>Sealability</b> ASTM F37A (1/32")	0.5ml/hr
<b>Compressibility</b> ASTM F36A	40-50%
<b>Recovery</b> ASTM F36A	10-15%
<b>Purity of Graphite</b>	95% minimum
<b>Leachable Chloride Content</b> FSA Method (Typical)	50 ppm
<b>Density</b> DIN3754	70 lb/ft <sup>3</sup> (1.1 g/cc)
<b>Color</b> (Top/Bottom)	Silver
<b>Special Feature:</b>	Anti-Stick Coating Available Call 1.800.990.7325 for additional information.

**Pressure & Temperature Graphs:**  
 Material Thickness: 1/16"

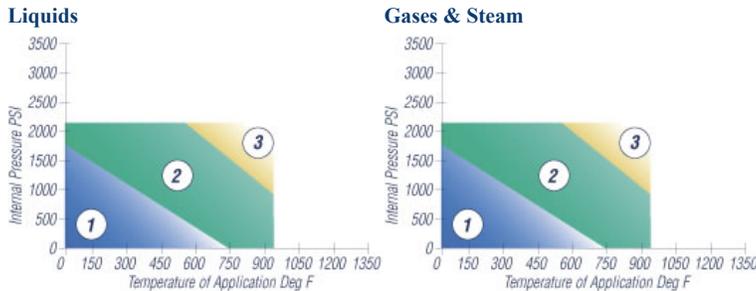

The pressure/temperature graphs shown are the most current method of determining the suitability of a gasket material in a known environment. Use the pressure and temperature graphs to select the most suitable material for your application.

- 1. In area one, the gasket material is suitable using common installation practices subject to chemical compatibility.
- 2. In area two, appropriate measures are necessary for installation of the gasket to ensure maximum performance. Please call or refer to the KLINGER® expert software system for assistance.
- 3. In area three, do not install gaskets in these applications without first referring to the KLINGER® expert software system or contacting Thermoseal Inc.'s technical support service

These graphs were developed from testing Klinger materials. Do not use them for competitors' materials since non-asbestos gasketing materials do not have service equivalents.

**Use:** The limitations of use, as shown in the graphs, are for guidance only, and are based on 1/16" thick material. The limitations of use decrease significantly as gasket thickness increases. Do not use a thicker gasket material or "double gaskets" to solve a gasket problem without first consulting the manufacturer. The ability of a gasket material to make and maintain a seal depends not only on the quality of the gasket material, but also on medium being sealed, the flange design, the amount of pressure applied to the gasket by the bolts and how the gasket is assembled into the flanges and tightened.



**Seal & Design  
 Able Division**  
 5533 Steeles Avenue West Unit 11  
 Toronto, Ontario M9L 1S7  
 Ph: (416) 741-0750  
 Gasket@AbleSealAndDesign.com



**Seal & Design  
 Corporate Headquarters**  
 4015 Casilio Parkway  
 Clarence, NY 14031  
 Ph: (716) 759-2222  
 Info@SealAndDesign.com  
 www.SealAndDesign.com



**Seal & Design  
 Higbee Division**  
 6741 Thompson Rd N  
 Syracuse, NY 13221  
 Ph: (315) 432-8021  
 Sales@Higbee-Inc.com