

**ROTT TEST DATA**  
**Thermiculite 845 Flexpro (Kammprofile)**  
**Style ZG 5.0 x 5.9 x 0.156 in.**

Gb	1,780 psi
a	0.169
Gs	1,080 psi
T <sub>p</sub> MIN	1
T <sub>p</sub> MAX	468,718
S <sub>100</sub>	3,869 psi
S <sub>1000</sub>	5,708 psi
S <sub>3000</sub>	6,872 psi
S <sub>10000</sub>	8,421 psi

**Thermiculite®**


INNOVATIVE. VERSATILE. COMPLETE.



**CRITICAL SERVICE SERIES**  
 Thermiculite® 845, high temperature facing for Flexpro (Kammprofile) gaskets.

**Design Properties**

m	2.0
Y	2,500 psi

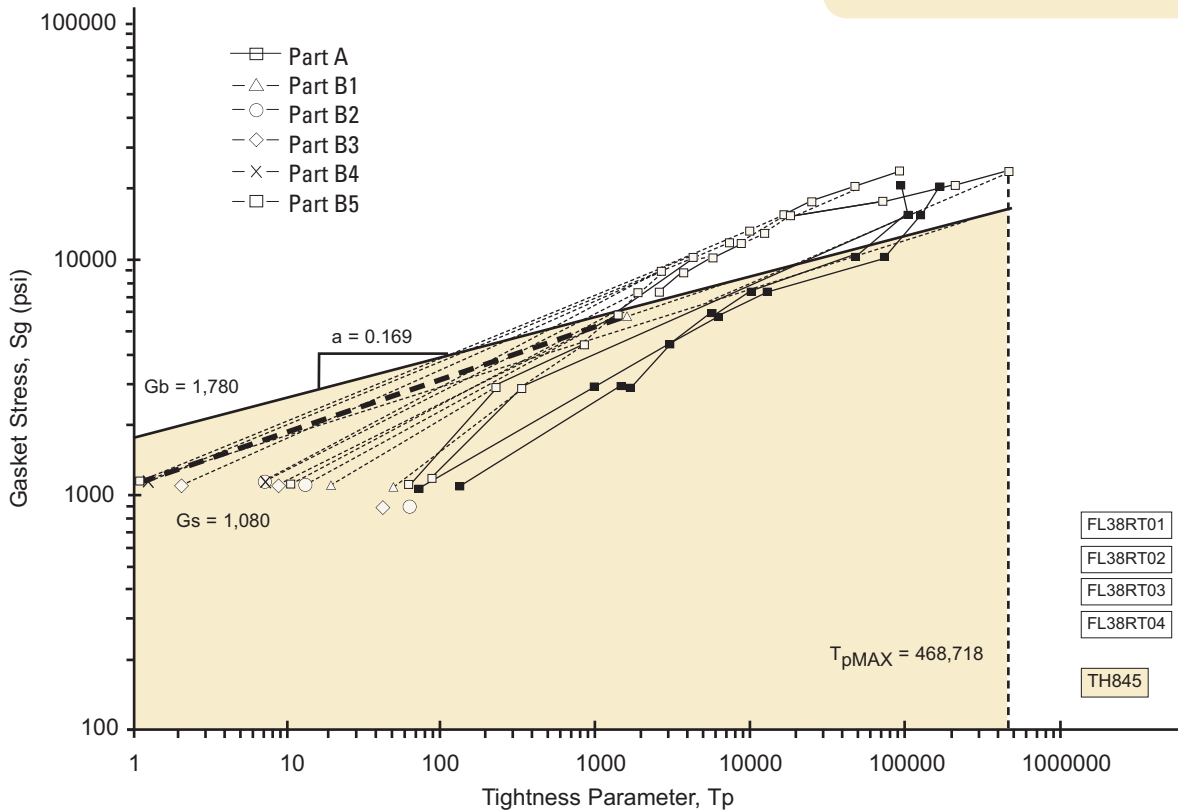

**Seal & Design**  
**Able Division**  
 5533 Steeles Avenue West Unit 11  
 Toronto, Ontario M9L 1S7  
 Ph: (416) 741-0750  
 Gasket@AbleSealAndDesign.com

**Seal & Design**  
**Corporate Headquarters**  
 4015 Casilio Parkway  
 Clarence, NY 14031  
 Ph: (716) 759-2222  
 Info@SealAndDesign.com  
 www.SealAndDesign.com

**Seal & Design**  
**Higbee Division**  
 6741 Thompson Rd N  
 Syracuse, NY 13221  
 Ph: (315) 432-8021  
 Sales@Higbee-Inc.com